
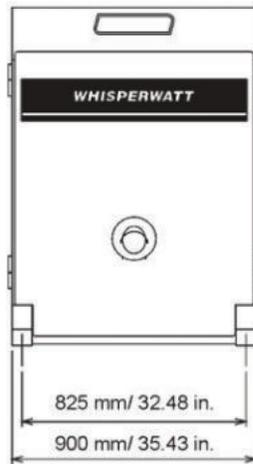



DCA-45SSIUII



Imagen Ilustrativa.

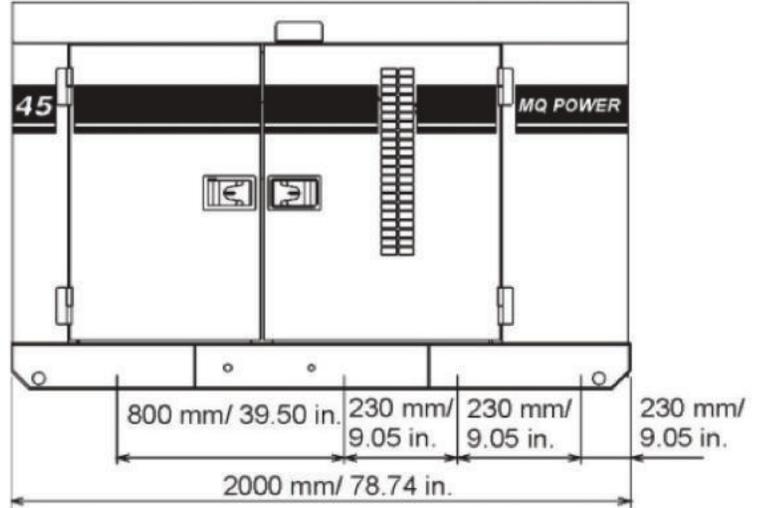

1250 mm / 49.21 in.

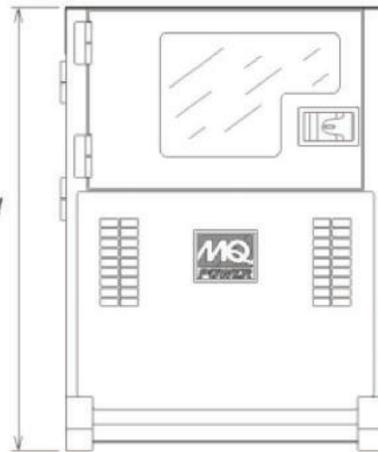

1 (Un) Generador portátil marca Multiquip, modelo DCA-45SSIUII de la serie WhisperWatt Super-Silent con las siguientes especificaciones:

Table 1. Generator Specifications		
Model	DCA-45SSIUII	
Type	Revolving field, self ventilated, open protected type synchronous generator	
Armature Connection	Star with Neutral	Zig Zag
Phase	3	Single
Standby Output	47.7 KVA (38.2 KW)	27.6 KW
Prime Output	45 KVA (36 KW)	26 KW
Voltage	240V or 480V	240/120V
Frequency	60 Hz	
Speed	1,800 rpm	
Power Factor	0.8	1
Aux. AC Power	Single Phase, 60 Hz	
Voltage	120 VAC	
Output	4.8 KW (2.4 KW x 2)	

Engine Specifications		
Model	ISUZU B-4BG1	
Type	4 Cycle, water-cooled, direct injection	
No. of Cylinders	4 cylinders	
Bore x Stroke	4.13 in. x 4.92 in. (105 mm x 125 mm)	
Rated Output	55.2 HP/1,800 rpm	
Displacement	268 cu. in. (4,392 cc)	
Starting	Electric	
Coolant Capacity	5.3 gal. (20 liters)	
Lube Oil Capacity	3.4 gal. (12.9 liters)	
Fuel Consumption	2.7 gal. (10.3L)/hr at full load	2.0 gal. (7.6L)/hr at 3/4 load
	1.5 gal. (5.7L)/hr at 1/2 load	1.1 gal. (4.2L)/hr at 1/4 load
Battery	12V- 100AH	
Fuel	#2 Diesel Fuel	