




DCA-70SSI

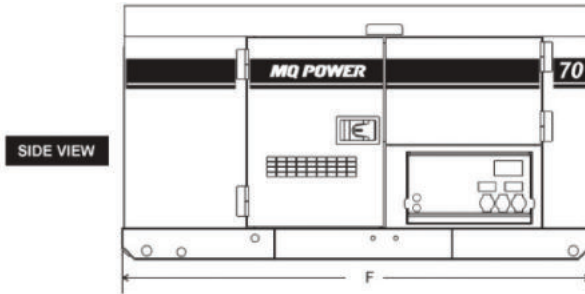

Reference Letter	Dimension in. (mm)	Reference Letter	Dimension in. (mm)
A	30.31 in. (770 mm.)	F	94.48 in. (2,400 mm.)
B	29.52 in. (750 mm.)	G	55.11 in. (1,400 mm.)
C	35.82 in. (910 mm.)	H	35.43 in. (900 mm.)
D	29.52 in. (750 mm.)		
E	35.82 in. (910 mm.)		

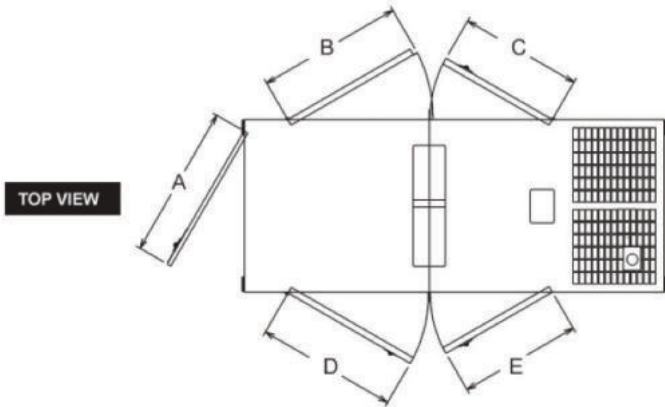

1 (Un) Generador portátil marca Multiquip, modelo DCA-70SSI de la serie WhisperWatt Super-Silent con las siguientes especificaciones:

Table 1. Generator Specifications	
Model	DCA-70SSIU
Type	Revolving field, self ventilated, open protected type synchronous generator
Armature Connection	Star with Neutral Zigzag
Phase	3 Single
Standby Output	58.8 kVA (47 kW) 34 kW
Prime Output	56 kVA (44.8 KW) 32 KW
Power Factor	0.8 1.0
Voltage	200 or 400V 100 or 200V
Frequency	50 Hz
Speed	1500 rpm
Aux. AC Power	Single Phase, 50 Hz
Aux. Voltage/Output	4.8 Kw (2.4 kW x 2)
Table 2. Engine Specifications	
Model	ISUZU FF-4BG1T
Type	4 cycle, water-cooled, direct injection, turbo-charged
No. of Cylinders	4 cylinders
Bore x Stroke	4.13 in. x 4.92 in. (105 mm x 125 mm)
Displacement	264 cu. in. (4,329 cc)
Starting	Electric
Coolant Capacity	3.43 gal. (13.2 liters)
Lube Oil Capacity	3.49 gal. (13.2 liters)
Fuel Type	#2 Diesel Fuel
Fuel Tank Capacity	40 gal. (150 liters)
Fuel Consumption	3.6 gal. (13.6 L)/hr at full load
Battery	27(CCA 0° F 700A) X 1